



# Measuring for Replacement Sprung Axles



**Straight Axle**

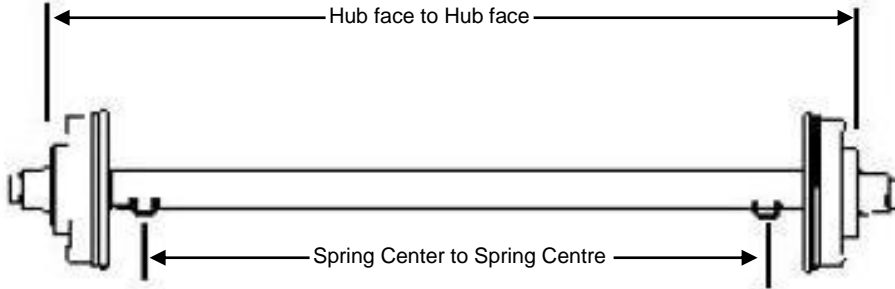

**4" Drop Axle**

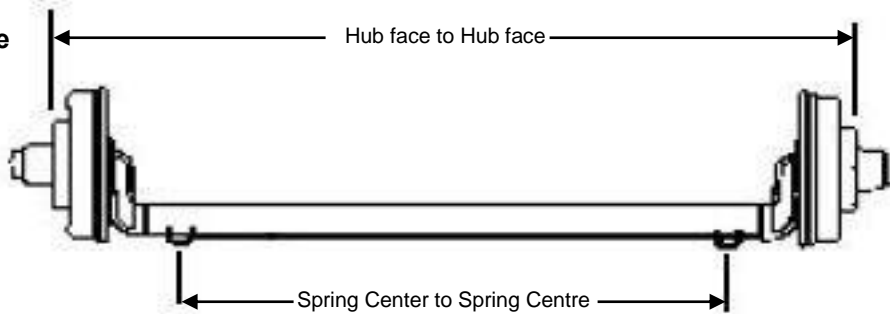

Date: \_\_\_\_\_ PO#: \_\_\_\_\_ Contact: \_\_\_\_\_

Customer Name: \_\_\_\_\_ Telephone: \_\_\_\_\_ Email: \_\_\_\_\_

Capacity (2000LB, 3500LB, 6000LB, 7000LB etc): \_\_\_\_\_

Bolt Pattern (4 Bolt, 5 Bolt\*, 6 Bolt, 8 Bolt) \_\_\_\_\_

Hub Face to Face: \_\_\_\_\_ Brake Type: \_\_\_\_\_  
*(Idler, Electric, Hydraulic Free Backing, Etc.)*

Lube Type: \_\_\_\_\_  
*(Grease, EZ of Nev-r-lube Bath)*

Stud Size: \_\_\_\_\_  
*(1/2", 9/16", 5/8" Etc...)*

Qty: \_\_\_\_\_

Straight: \_\_\_\_\_ 4" Drop \_\_\_\_\_

Spring Center: \_\_\_\_\_

Beam Diameter: \_\_\_\_\_

Under Slung OR Over Slung: \_\_\_\_\_

\_\_\_\_\_ Axle Order – No Return of Axle except for Warranty

\_\_\_\_\_ Axle in Stock – Returnable with permission only and if not used or mounted.

Please email completed form to: \_\_\_\_\_

**\*Please Note**  
 Standard 5 bolt pattern on trailer axles is **5 on 4 1/2"** bolt circle.  
 There are also:  
     5 on 4 3/4"  
     5 on 5"  
     5 on 5 1/2"  
 Please ensure you order the correct 5 bolt pattern.