



Measuring for Replacement Spring Axles

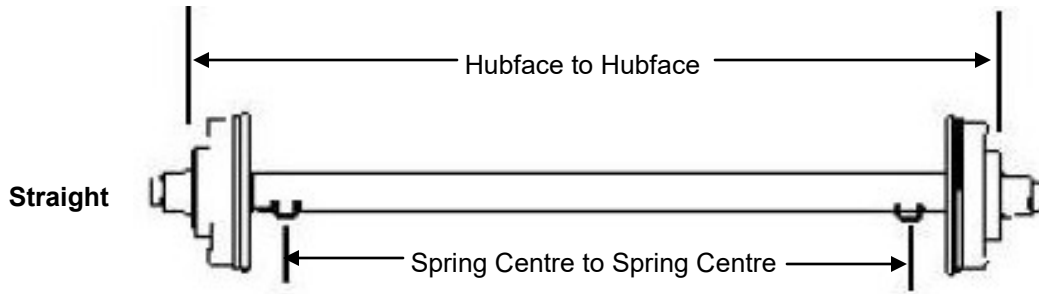

Underslung—Spring seats on bottom of axle beam Overslung—Spring Seats on top of axle beam

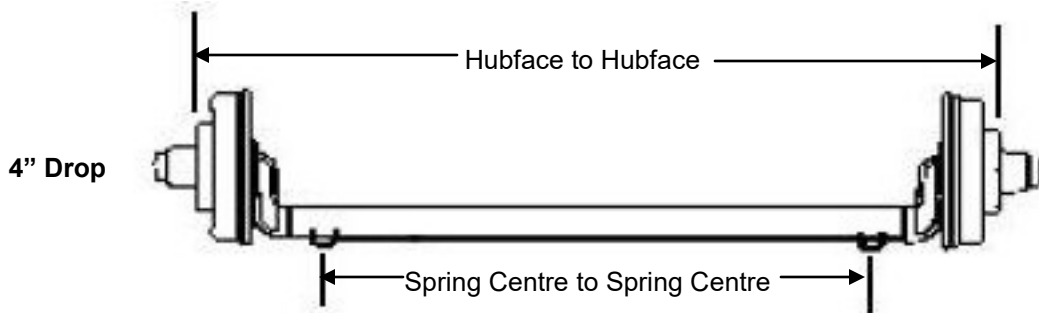

PLEASE NOTE
**** Special order**
axles cannot be
returned with the
exception of axles
to be assessed for
warranty**

Date: _____ PO#: _____ Contact: _____

Customer Name: _____ Telephone: _____ Email: _____

Capacity (2000LB, 3500LB, 6000LB, 7000LB etc): _____ Quantity of axles to order: _____

Round Beam or Square Beam: _____ Beam Diameter (1 3/4", 2 3/8", 3", 4", 5"): _____

Straight Beam or 4" Drop Beam: _____ Underslung or Overslung: _____

Hub Face to Face: _____ Spring Centre to Spring Centre _____

Brake Type: _____ Lube Type: _____
 (Idler, Electric, Hydraulic Disc, etc.) (Grease, EZ of Nev-r-lube, Oil Bath, etc.)

Bolt Pattern (4 Bolt, 5 Bolt*, 6 Bolt, 8 Bolt): _____

Stud Size: (1/2", 9/16", 5/8" Etc.): _____

***Please Note**
 Standard 5 bolt pattern on trailer axles is **5 on 4 1/2"**
 bolt circle.
 There are also: 5 on 4 3/4, 5 on 5, 5 on 5 1/2
 Please ensure you order the correct 5 bolt pattern.

Please email completed form to: _____ Or Fax to 306 773 6080